


# REVISIONS

REV #	DATE	BY:

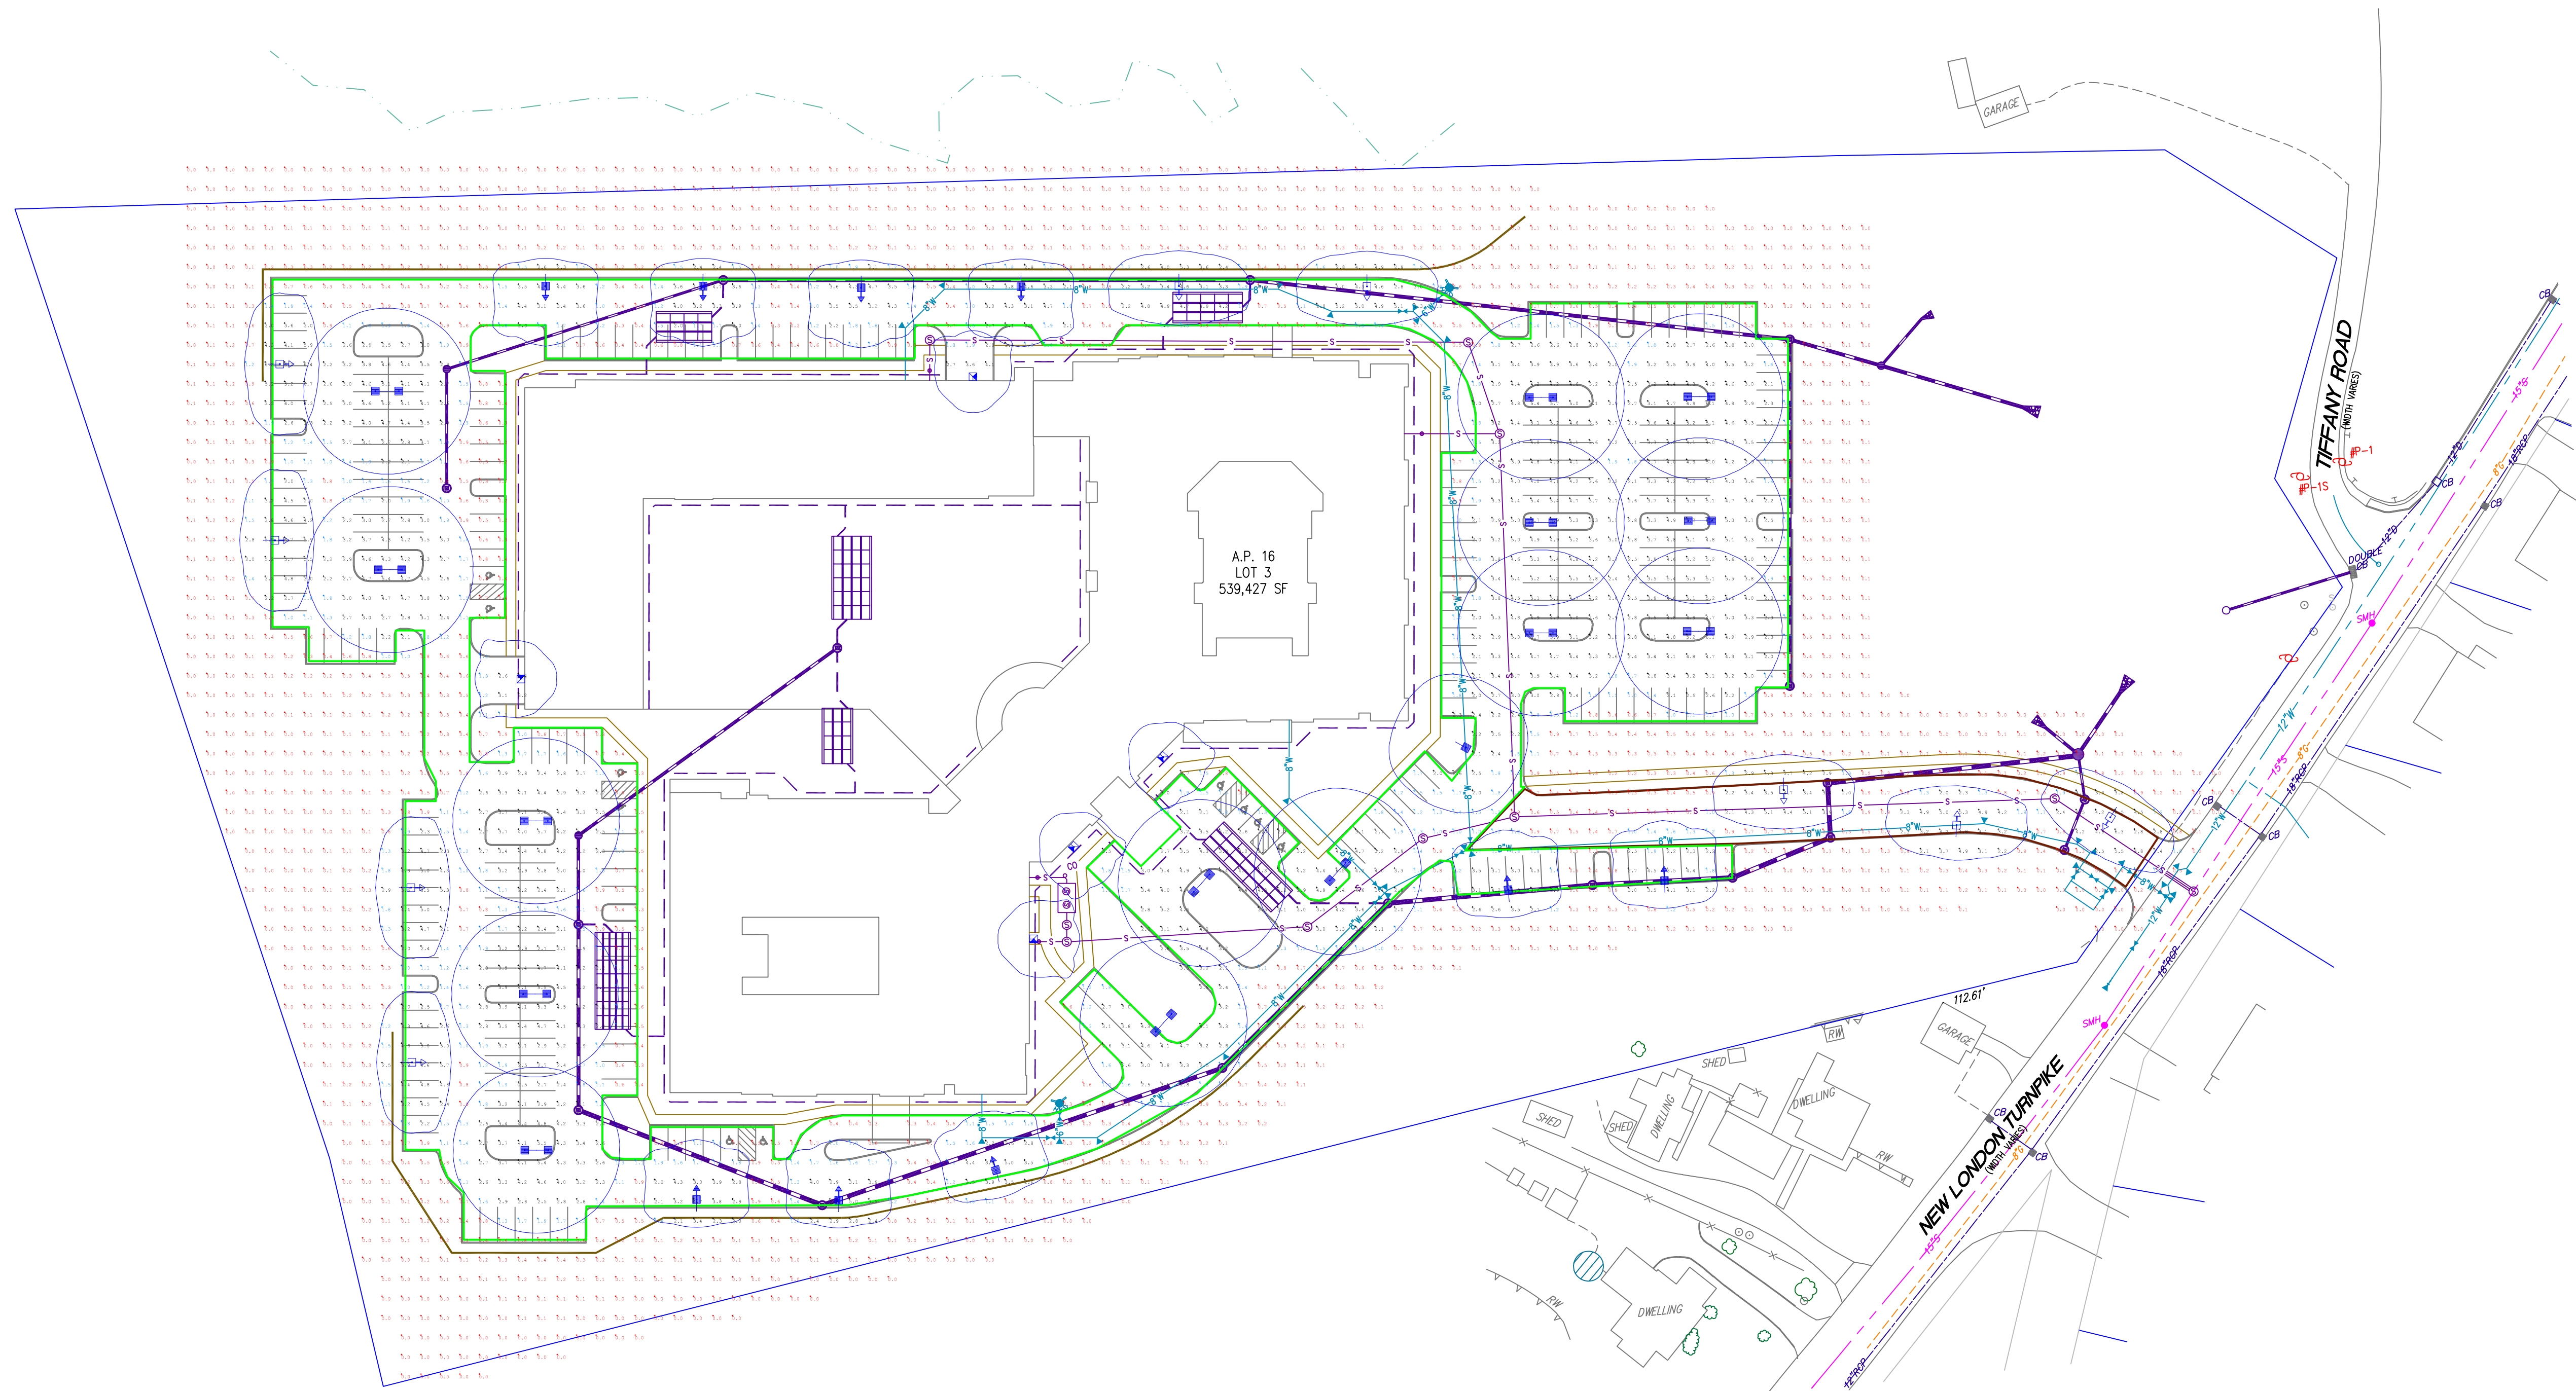

BASED ON THE INFORMATION PROVIDED, ALL DIMENSIONS AND LUMINAIRE LOCATIONS SHOWN REPRESENT RECOMMENDED POSITIONS. THE ENGINEER AND/OR ARCHITECT MUST DETERMINE APPLICABILITY OF THE LAYOUT TO EXISTING OR FUTURE FIELD CONDITIONS.

THIS LIGHTING PATTERN REPRESENTS ILLUMINATION LEVELS CALCULATED FROM LABORATORY DATA TAKEN UNDER CONTROLLED CONDITIONS UTILIZING CURRENT INDUSTRY STANDARD LAMP RATINGS IN ACCORDANCE WITH ILLUMINATING ENGINEERING SOCIETY APPROVED METHODS. ACTUAL PERFORMANCE OF ANY MANUFACTURER'S LUMINAIRE MAY VARY DUE TO VARIATION IN ELECTRICAL VOLTAGE, TOLERANCE IN LAMPS AND OTHER VARIABLE FIELD CONDITIONS.

Label	Avg	Max	Min	Avg/Min	Max/Min	PtSpLr	PtSpTb
ENTRANCE	2.0	6.3	0.2	10.2	31.5	10	10
OVERALL PARKING	2.4	6.7	0.2	12.1	33.5	10	10

Symbol	Qty	Label	Lumens	LLF	Description	Lum. Watts
+	14	A	N.A.	0.980	WLS-OSQM-B-9L-40K7-5N-SLW 15' MOUNTING HEIGHT	60
+	1	B	N.A.	0.980	WLS-OSQM-B-9L-40K7-5N-SLW 15' MOUNTING HEIGHT	60
+	9	C	N.A.	0.980	WLS-OSQM-B-9L-40K7-4M-BLSMP-SLW 15' MOUNTING HEIGHT	60
+	9	D	N.A.	0.980	WLS-OSQM-B-9L-40K7-2M-SLW 15' MOUNTING HEIGHT	60
+	5	E	N.A.	0.980	WLS-XSPW-B-WM-4ME-4L-40K-SLW 12' MOUNTING HEIGHT	31

WILLOW LAKES ASSISTED LIVING  
COVENTRY, RI

**WLS LIGHTING**  
a WLS company

1919 WINDSOR PLACE  
FORT WORTH, TX 76110  
WWW.WLSLIGHTING.COM

WLS-16905A

DATE - 3/17/21

SCALE: 1"=50'

800-633-8711

PM: ROBBY

BY: TO

SHEET 1 OF 1